



rba

'BENEFIT HD' HEAVY DUTY SERIES



RBA1015 'BENEFIT HD' HEAVY DUTY SERIES TAP

Special Features

- Self-cleaning mechanism
- Water Saving
- Vandal Resistant
- Easy to Operate
- Low Maintenance
- Easy to Install

Description

Self-closing tap is designed for multiple Accessible applications [offices, schools, shopping centres, stadiums, airports, public washrooms, etc]. Cast from heavy duty DZR brass, then chrome plated to a polished finish. Single connection, valve will deliver cold or pre mixed water, single temperature only.

Designers Note:

1. Requires only 9N of force to operate at 400 kPa.
2. RBA product is disabled compliant if it is installed on an appropriate basin (eg. Basin RBA8889 Series) and meets the requirements stipulated in the AS1428.1-2009.

Hydraulic Requirements at Each Tap

Inlet: 1/2" BSP (G1/2")
 Operating pressure: 200 – 500 kPa
 Flow Time: 4-10 seconds (non-adjustable)
 Maximum Temp.: 55°C
 Flow Rate: 4.5L/8L per minute
 Warranty: 2 Years from purchase

Construction

Heavy Duty DZR brass construction with polished chrome finish.

Operation


Tap is activated by pushing/pulling the lever, flow will cease when preset time is achieved.

Available Models

- RBA1015-600 6 Star Self Closing Lever Tap - Polished
 RBA1015-400 4 Star Self Closing Lever Tap - Polished

Optional Extras

- RBA1083-999-009 Heavy Duty Brass Locknut (please specify in addition to tap when installing in vandal prone areas)

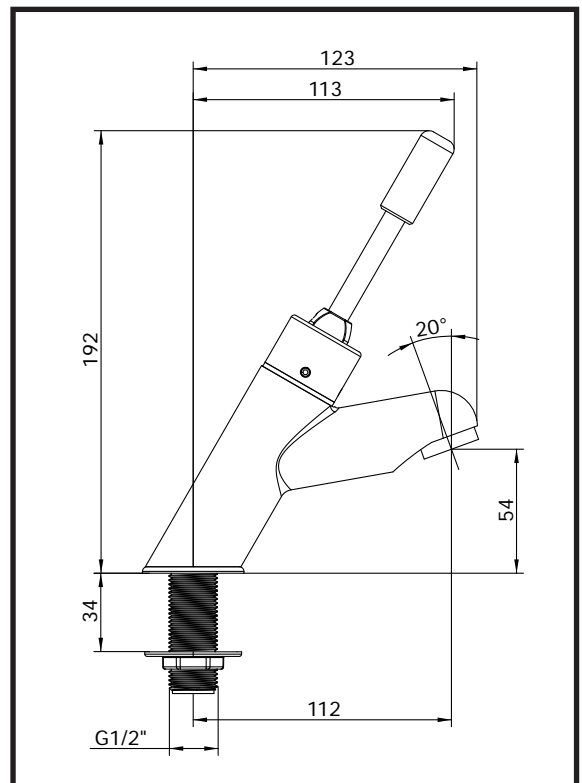

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.



As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 08/12

© 2012 by RBA Group TD/Model RBA1015/0812