



# 90° ANGLED AMBULANT GRAB RAIL



### Description

Stainless Steel 90° angled grab rail meets all requirements of the ambulant section of AS1428.1-2009 (amdt 1, 2010) when installed correctly. Unit is ambidextrous and can be mounted on either Left or Right Hand side.

### Materials

**Bar:** Type-304 Stainless Steel tubing with satin finish, 32mm Dia.

**Concealed Mounting Flanges:** Type- 304 Stainless Steel with multiple holes for attachment to wall.

**Flange Cover:** Type-304 Stainless Steel, clips over mounting flange to conceal fixing points.

**Fixings:** By others.

### Installation

Warning: Grab Rails are no stronger than the anchors or walls to which they are attached and, therefore, must be firmly secured in order to support the loads for which they are intended.

### Available Options:

**RBA4090-450**

Ambulant Grab Rail 90° 450 x 450mm

**RBA4090-999-001**

Single Dress Plate for panel mounting

### Related Products:

**RBA4330-022**

Tactile Sign, Male Ambulant, Type-316 Stainless Steel


**RBA4330-023**

Tactile Sign, Female Ambulant, Type-316 Stainless Steel

**RBA1530-402**

Double Toilet Roll Holder to suit AS1428.1-2009, Fig 53, Amdt No. 1, 2010

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

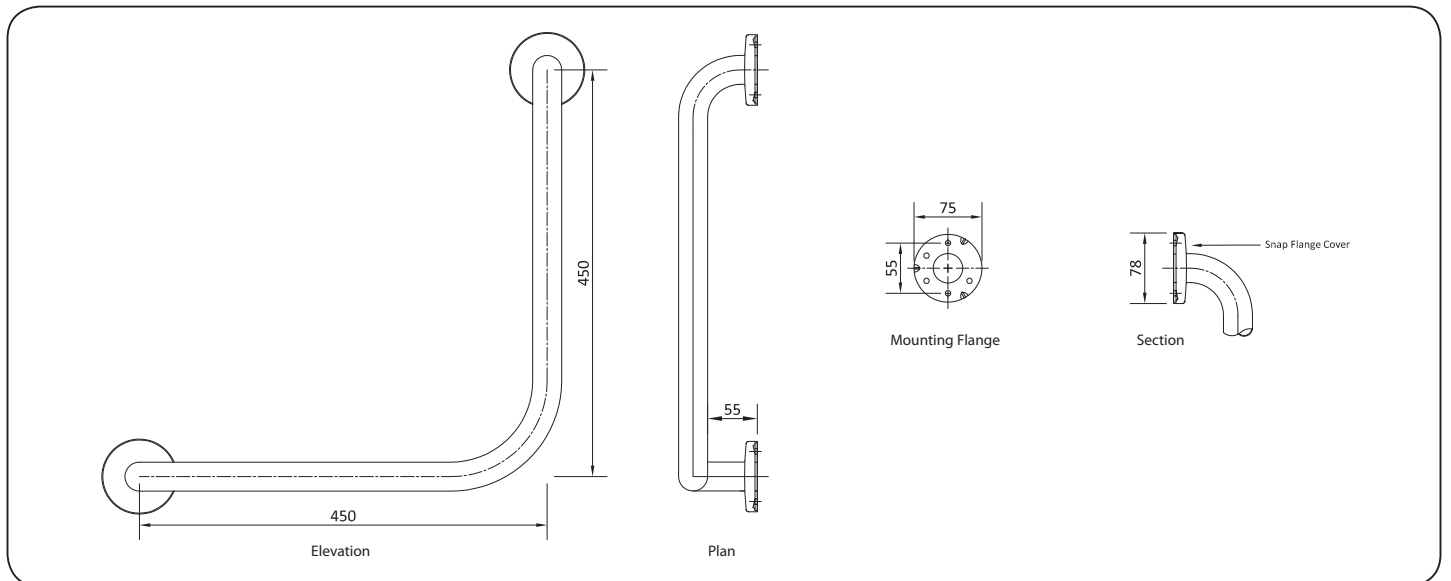

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice.

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet.

Revised 08/14

© 2014 by RBA Group

TD/Model RBA4090-450/0814

**SYDNEY • MELBOURNE • BRISBANE • PERTH • AUCKLAND**

**Australia** 1300 788 778 • sales@rba.com.au • www.rba.com.au

**New Zealand** 0800 722 111 • sales@rbagroup.co.nz • www.rbagroup.co.nz